


938487 Wireless , Control Wiring

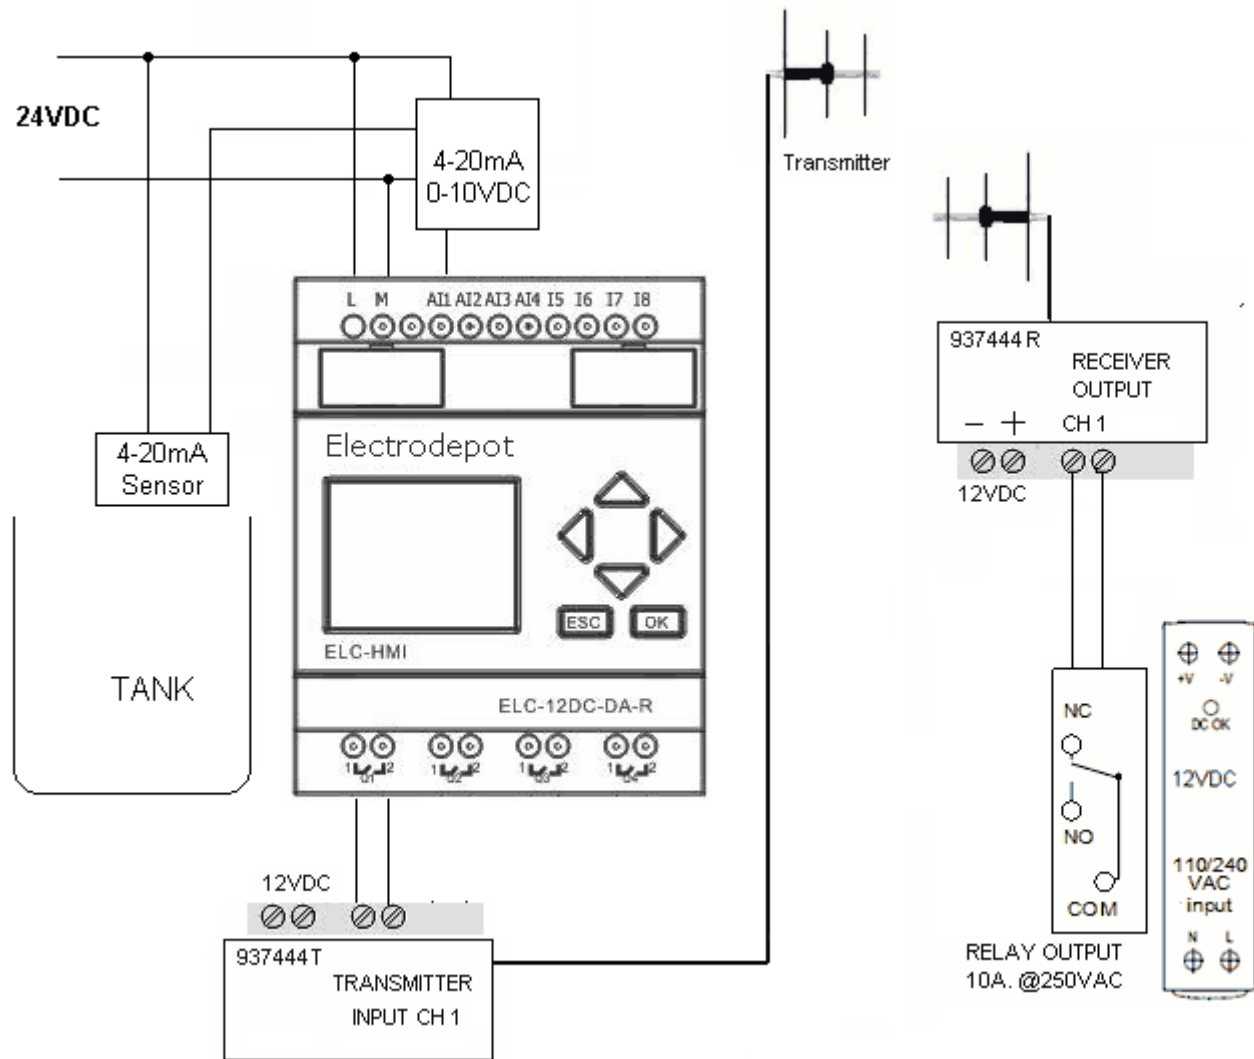

Operating Voltage:	12 VDC and 24VDC
Operating Temperature:	-4° to +140° F (-20° to +60° C)
Number of Codes:	64000 codes, factory preset 16 BIT Digital
Compliance:	FCC CFR part 15.247
Transmission Power	per FCC Part 15.249, 50mV/m @ 3m
Carrier Frequency	433MHz, industrial band Free ISM band
Current Transmitter	Standby 70mA, transmitting 600mA
Current Receiver	Standby 70 mA, operation, 300mA
Data Input TX	4-20mA or 0-10vdc
Relay Output	10Amp max, 240V max Class 2 pilot duty
Antenna Impedance	50 Ohms Quarter Wave Antenna optional
Enclosure	NEMA 4, IP65 weatherproof enclosure

OPERATION:

Automatic: By Tank level sensor

On and OFF Settings pre-programmed by client in the transmitter module Programmable Controller